





JANOME 1110DX

3-4 Thread or 2-Thread overlocking


So Advanced, So Quick, So Easy To Thread

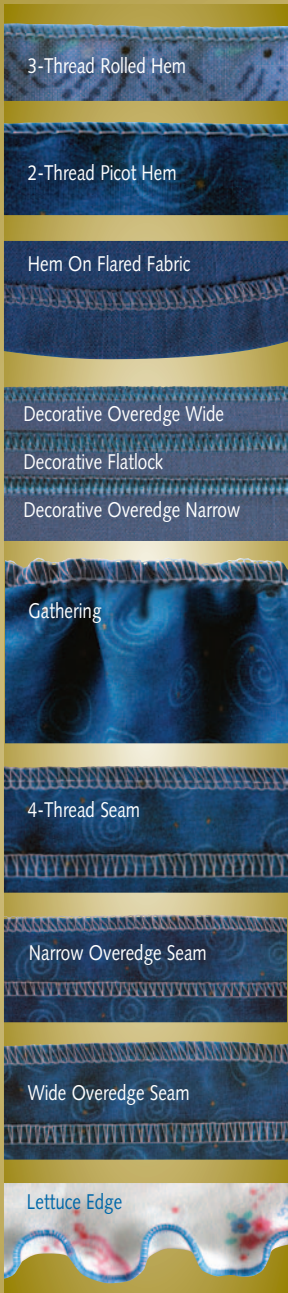


Easy-To-Follow Upper Thread Guides

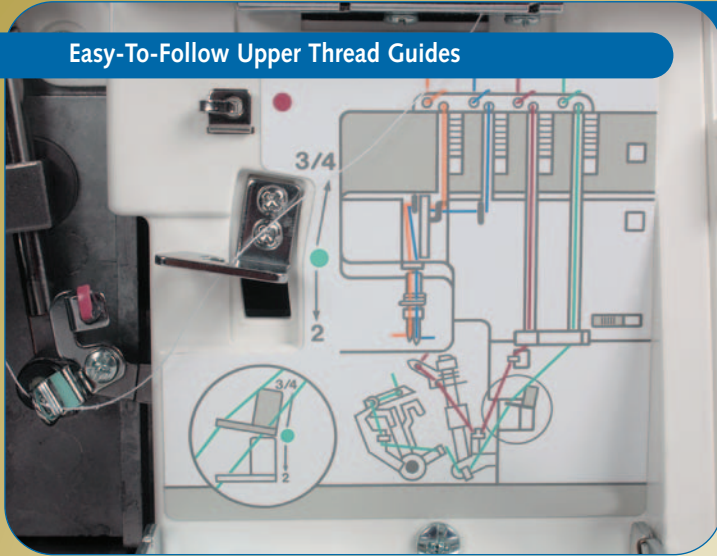

The Threading Chart and Colour-Coded Guides are easy to follow for 2-thread or 3-4 thread overlocking.

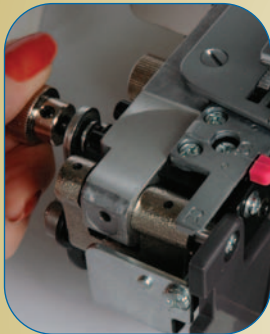


Adjustable Cutting Width.

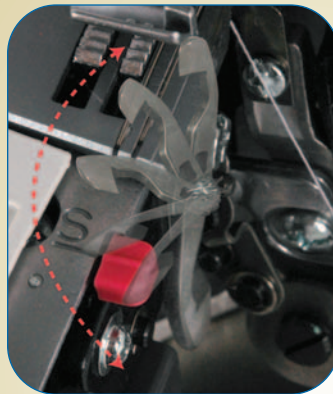


Easily Retractable Upper Knife.

Dual Feed Dogs And Differential Feed Ensure Optimum Precision

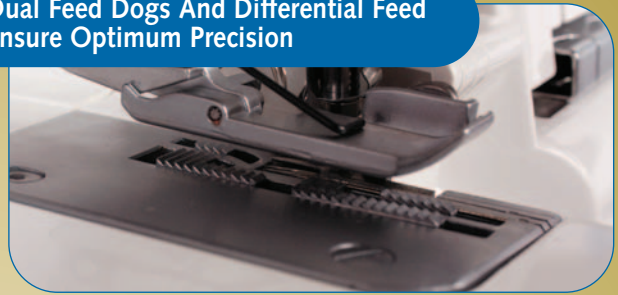

The 1110DX has a Differential Feed device with two feed dogs, virtually eliminating puckered edges on woven fabrics and stretched edges on knits. One feed dog moves the exact amount of fabric needed for the stitch length while the other pushes or pulls the fabric according to the ratio on the differential feed dial. This ratio can be set anywhere from 0.5 to 2.25.

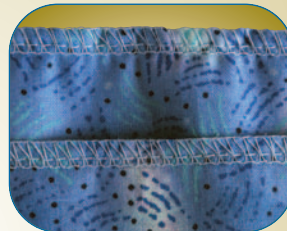


Differential Feed 0.5-1.0



Differential Feed 1.0-2.25

Easy To Reach Lower Loooper Guides

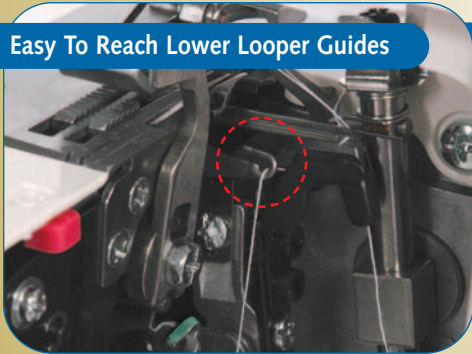


Threading the Lower Loooper is a breeze when you have easy access. Just rotate the thread guide and the lower looper thread guides pop into view.




Solid metal base plate keeps machine stable, quiet and smooth running.

Quick Change Rolled Hem

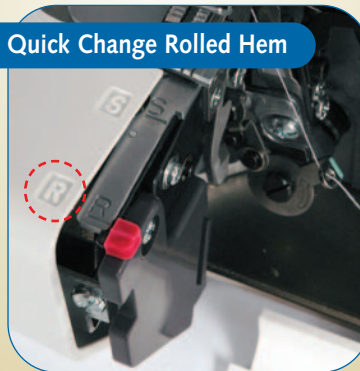

No need to change the needle plate for rolled hemming. Just slide the needle plate to "R" position and choose "R.H." on the lower looper pre-tension setting slider.



SPECIFICATIONS

SEAM TYPE: 2 and 3/4 THREAD OVERLOCK
 NEEDLE: Janome Ballpoint (15x15P)
 SEAM LENGTH: 1-5mm
 SEAM WIDTH: 3.5mm (regular); 5.7mm (wide); 2.00mm (narrow)
 DIFFERENTIAL FEED RATIO: 0.5-2.25
 NEEDLE GUARD: Front and Back
 CUTTING WIDTH: Adjustable
 UPPER KNIFE: Retractable
 TENSION DIALS: Numbered (ONE ROTATION)
 THREAD GUIDES: Colour coded
 PRESSER FOOT: Snap-on type
 SPEED CONTROL: Electronic



JANOME
1110DX

Your authorised Janome Specialist

www.janome.com.au